

LEDDriving SL C5W 6418 WHITE

Ideal replacement for any vehicle



Suitable for various vehicle exterior applications

Available in Cool White




Replaces conventional C5W lamps

Easy upgrade to LED technology with plug & play solutions



Reliable OSRAM quality stands for less lamp replacements

4-year OSRAM guarantee (refer to www.osram.com/am-guarantee for precise conditions)

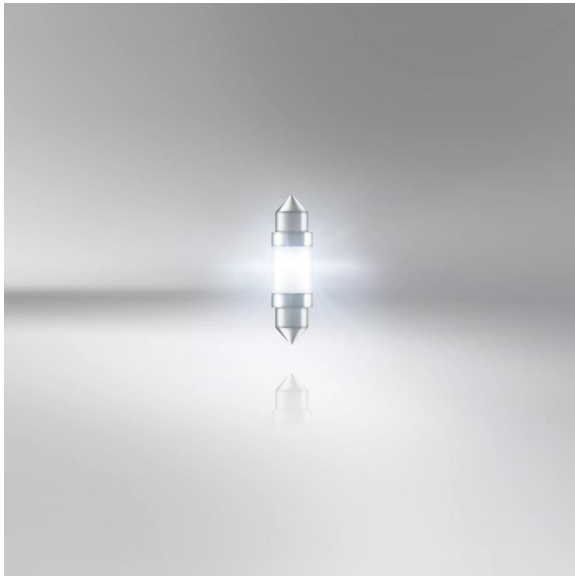

Suitable LED replacement for C5W

LEDDriving SL C5W replacement lamps offer a modern and intense light with a color temperature up to 6,000 Kelvin. These replacement lamps are suitable for all conventional C5W lamp bases. In comparison to standard lamps, these LED retrofit lamps use up to 80% less energy. OSRAM offers a 4 year guarantee for these LEDDriving SL lamps. These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Product datasheet

Technical data

Product information

Product type (off-road vs. on-road)	Off-road \triangleq C5W
Application (Category and Product specific)	Mainly used for number plate/ interior applications

General Product Information

Global order reference	6418DWP
------------------------	---------


Electrical Data

Power input	0.8 W
Nominal voltage	12 V
Nominal wattage	0 W
Test voltage	13.5 V
Power input tolerance	± 25 %

Photometric Data

Nominal luminous flux	45 lm
Luminous flux tolerance	± 30 %
Color temperature	6000 K
Light color LED	Cool white

Physical Attributes & Dimensions



Diameter	11.0 mm
Product weight	2.90 g
Length	36.0 mm
Lamp base	SV8.5-8

Lifetime Data

Product datasheet

Lifespan B3	2500 hr
Lifespan Tc	5000 hr
Guarantee	4 years

Capabilities

Technology	LED ¹⁾
-------------------	-------------------

¹⁾ Light-emitting diode lamp

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4062172054126 4062172150651 4062172054140 4062172401159
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	95682f27-d6b7-4151-ab69-cba0f44a2086 4f83cbb3-5bb8-46d9-b0d0-90cb2627a962 6697cab8-36c6-4db3-8425-09dae59efdcb 10e60bb5-8b39-4d1f-8551-c46ae9a84cdd a95423f8-e9f7-4f9b-91d7-326600bc64dc 8bacbba0-9b26-4b24-82cf-75519f9f5e26 122507a5-f401-4168-bc67-e2333e8a1a33 89d2ab14-22f4-42c2-afca-16d0b8a637b8 4e91a51d-54e6-41cd-aa04-c08cac7661e6 8021f719-e7de-457e-97c8-27fd6614ff14



Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172054126	LEDDriving SL \cong C5W	Blister 1	135 mm x 95 mm x 13 mm	0.22 dm ³	13.00 g
4062172054133	LEDDriving SL \cong C5W	Shipping carton box 5	71 mm x 104 mm x 146 mm	1.08 dm ³	98.00 g
4062172401159	LEDDriving SL \cong C5W	BLI ECO 1	95 mm x 17 mm x 135 mm	0.22 dm ³	14.00 g
4062172401166	LEDDriving SL \cong C5W	Shipping carton box 5	142 mm x 64 mm x 104 mm	0.95 dm ³	94.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Product datasheet

Download Data

File	
	User instruction GPRS_Safety symbols instructions
	Brochures LEDriving Retrofits - Exchange overview (EN)

Safety advice

Canbus compatible Coloured lamps for usage behind coloured glass

Legal advice

These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM